

jc604 U.S. PTO
03/30/00

3-31-00
LERNER AND GREENBERG, P.A.

PATENT ATTORNEYS AND ATTORNEYS AT LAW

2200 Hollywood Boulevard
Hollywood, Florida 33020
Tel. (954) 925-1100
Fax: (954) 925-1101

Herbert L. Lerner (NY Bar)
Laurence A. Greenberg (FL Bar)

Werner H. Stemer (FL Bar), Senior Attorney

Ralph E. Locher (FL, IL, MO Bars)
Manfred Beck (US & German Pat. Agent)
Mark F. Weichselbaum (TX Bar)
Gregory L. Mayback (FL Bar)
Markus Nollf (FL Bar)
Otto S. Kauder (Reg. Pat. Agent)
Adam A. Jorgensen (Reg. Pat. Agent)

www.patentusa.com
patents@patentusa.com

Mailing Address:
Post Office Box 2480
Hollywood, FL 33022-2480

A
03/30/00
09/538792
U.S. PTO
New York Office
153 E 57th Street
Suite 15G
New York, NY 10022

"Express Mail" mailing label number EL080658160US
Date of Deposit March 30, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Docket No.: GR 97 P 2659

Date: March 30, 2000

Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Enclosed herewith are the necessary papers for filing the following application for Letters Patent:

Applicant : VINCENZO SCOTTO DI CARLO ET AL.
Title : METHOD FOR GIVING NOTIFICATION OF A MESSAGE TO A SUBSCRIBER

2 sheets of formal drawings in triplicate.
A check in the amount of \$ 690.00 covering the filing fee.
Information Disclosure Statement and 4 References.
PCT Publication (cover sheet only).

This application is being filed without a signed oath or declaration under the provisions of 37 CFR 1.53(d). Applicants await notification of the date by which the oath or declaration and the surcharge are due, pursuant to this rule.

The Patent and Trademark Office is hereby given authority to charge Deposit Account No. 12-1099 of Lerner and Greenberg, P.A. for any fees due or deficiencies of payments made for any purpose during the pendency of the above-identified application.

Respectfully submitted,

For Applicants

LAURENCE A. GREENBERG
REG. NO. 29,306

LAG:kc



03/30/00

GR 97 P 2659

METHOD FOR GIVING NOTIFICATION OF A MESSAGE TO A SUBSCRIBER5 Cross-Reference to Related Application:

This is a continuation of copending International Application PCT/DE98/02629, filed September 7, 1998, which designated the United States.

10 Background of the Invention:Field of the Invention:

The invention lies in the telecommunications field. More specifically, the invention relates to a method for providing notification of a message to a subscriber who is registered with at least two message services.

In a large number of communication networks, for example ISDN networks, GSM networks, private networks and data networks, message services are available for voice messages or text messages. If a message arrives on one of these message services, the subscriber is suitably informed, for example by means of a visual display and/or an audible indicating tone.

The message services, however, are independent of one another and signal the arrival of a message only on specific terminals. For example, a message in the ISDN service is

indicated only on the fixed ISDN telephone of the user, or a GSM message is only indicated on the GSM terminal. The user may therefore fail to receive important messages if he or she does not have access to the respective terminal at a given
5 time. In the case of fixed terminals, the user cannot always be present at the terminal. The same applies to terminals such as cordless telephones which operate only in a spatially very limited area. In theory, the user could continuously carry mobile terminals, such as radiotelephones, on his or her
10 person, but this is impractical if there are a plurality of message services and a correspondingly large number of mobile terminals.

Many message services provide a remote access facility. For
15 example, an e-mail subscriber can usually dial into a commercial data network using a computer and a modem and check the mailbox. Such an interrogation by remote access does not, however, ensure that the user receives important messages immediately. Moreover, each interrogation involves a certain
20 degree of expenditure of time and money. This is particularly disadvantageous if an interrogation only produces the result that there are no messages.

Summary of the Invention:

25 The object of the invention is to provide method for notifying a subscriber of a message which overcomes the above-noted

deficiencies and disadvantages of the prior art devices and methods of this kind, and which permits even a subscriber who is registered with a plurality of message services to be informed of the presence of a new message in a way which is as reliable, quick and problem-free as possible.

With the above and other objects in view there is provided, in accordance with the invention, a method of notifying a subscriber of a plurality of message services of a message:

indicating, with each of a plurality of message services, to a common notification server a presence of a new message for a subscriber on the respective message service; and

transmitting, with the notification server, to at least one terminal of the subscriber a notification indicating that a new message is present and in which message service the new message is present.

The invention is based on the basic idea of providing a common notification server to which each message service indicates the presence of a new message for the subscriber. The notification server constitutes, as it were, the connection between the plurality of message services by transmitting a suitable notification to at least one terminal of the subscriber. This notification includes at least the

information that a new message is present and the message service in which this message is present.

The invention makes it possible to pass on information

5 relating to the presence of new messages to a suitable subscriber terminal or to a plurality of terminals of the subscriber. For example, the notifications may be transmitted to a single dual-mode radiotelephone of the subscriber. The subscriber then only needs to carry this one device on his
10 person in order to be continuously up to date in terms of new messages. If the notifications are directed to a plurality of terminals of the subscriber, the subscriber needs to be near to just one of these terminals, for example either to his fixed office telephone or to his home telephone. In all cases,
15 the subscriber receives the desired information quickly and reliably.

The notification server which is provided according to the invention supports all those message services of the
20 subscriber on which a notification of newly incoming messages is to be given. This does not necessarily mean that the notification server is physically a single module. Instead, the notification server may be formed from a plurality of computers or other systems which are networked to one another.

25 The only relevant factor is that the interaction of these

systems makes available the functions of the notification server.

In accordance with an added feature of the invention, if a message service indicates the presence of a new message, the notification server stores the data originating from the message service, until the respective notification has been transmitted successfully. The data are stored at least partially in the notification server, and at least until the respective notification is successfully transmitted. This increases the reliability of the method, because a notification can be transmitted repeatedly to a terminal of the subscriber. Moreover, in this case, it is also possible to provide an access facility of the subscriber to stored notifications from any terminals - after an authorization check.

In accordance with an additional feature of the invention, the notification server transmits the notification to all terminals of the subscriber.

In accordance with an alternative feature of the invention, the notification server transmits the notification to the terminal(s) selected by the subscriber to receive the notification.

The notification server can transmit to the subscriber only the information indicating the message service in which a new message is present. However, the subscriber preferably receives further information which the notification server obtains from a message header information item. The message header information item can be transmitted to the notification server by the message services either whenever a new message is present or only on request.

10 In accordance with another feature of the invention, the subscriber selects a terminal by transmitting a control information item from that terminal to the notification server.

15 In accordance with a further feature of the invention, a message header information item is transmitted with each message service to the notification server when a new message is present, and the message header information is transmitted with the notification server at least partially to at least
20 one subscriber terminal that is capable, at least partially, of outputting the message header information.

In accordance with again an added feature of the invention, the method further comprises, in response to a request by the
25 notification server, transmitting with each message service a message header information item to the notification server,

and transmitting the message header information item with the notification server at least partially to at least one subscriber terminal enabled to output the message header information at least partially.

5

In accordance with again an additional feature of the invention, the notification server firstly performs an authorization check in response to a subscriber request from any terminal, and then transmits the notifications present to the terminal.

10

In accordance with again another feature of the invention, the notification server processes the data originating from the message services for generating the notifications transmitted to the subscriber. Such processing may include filtering, ordering, and/or formatting the data.

15

In accordance with a concomitant feature of the invention, the notifications are transmitted by means of a signaling operation to the at least one terminal of the subscriber and/or by a call set-up.

20

Other features which are considered as characteristic for the invention are set forth in the appended claims.

25

Although the invention is illustrated and described herein as embodied in a method of notifying a subscriber of a message, it is nevertheless not intended to be limited to the details shown, since various modifications and structural changes may
5 be made therein without departing from the spirit of the invention and within the scope and range of equivalents of the claims.

The construction and method of operation of the invention,
10 however, together with additional objects and advantages thereof will be best understood from the following description of specific embodiments when read in connection with the accompanying drawings.

15 Brief Description of the Drawings:

Fig. 1 is a schematic view of a variety of communications paths in a first exemplary embodiment of the invention;

Fig. 2 is a schematic view of the communications paths in a
20 second exemplary embodiment; and

Fig. 3 is a schematic view of the data flow in a notification server in a third exemplary embodiment.

Description of the Preferred Embodiments:

Referring now to the figures of the drawing in detail and first, particularly, to Fig. 1 thereof, there is seen a notification server MWIS which receives information from message services of a plurality of communication networks, namely an ISDN network (ISDN = Integrated Services Digital Network), a GSM network (GSM = Global System for Mobile Communications), a data network DN, and a private network referred to below as PISN.

Fixed ISDN telephones are provided as terminals in the ISDN network, and message services are available for text messages and voice messages. The GSM network has GSM cell phones (radiotelephones) as terminals. Message services available are a short text message service (SMS = Short Message Service) and various provider-dependent voice message services. Cord-bound or cordless telephones may be connected to the private network PISN; cordless telephones in particular according to the DECT standard (DECT = Digital Enhanced Cordless Communications). A short text message service is also available for DECT telephones, and further message services may be provided depending on the performance features of the private network PISN. Finally, an e-mail service for electronic mail, with which any desired digital data may be sent, is made available in the data network DN. The data network DN may be a commercial data network. Computers which are connected locally

to the data network DN may be used to access the e-mail service. In addition, it is possible to dial in to the data network DN by means of a telephone network using a portable computer.

5

The message services specified - and further services in alternative embodiments - indicate to the notification server MWIS any message which has newly arrived for a subscriber, by transmitting an appropriate information item to the

10 notification server MWIS. The method of data transmission depends on the message service. For example, a message display from the GSM network is given by means of a specific message indicator (MWI = Message Waiting Indication) or by means of a short text message transmitted to the notification server

15 MWIS. Such message indications may be transmitted in the form of an e-mail from the data network DN to the notification server MWIS. If the message server is connected to the ISDN network or another network by means of an ISDN line, suitable signaling operations may be transmitted on the D channel.

20 These and other communications possibilities are known per se and are to a certain extent standardized. For this reason they will not be described in detail here.

In the first exemplary embodiment described here, the
25 notification server MWIS receives from the individual message services merely the information that a new message is present.

In addition, the notification server MWIS can determine the transmitting message service either from the port via which the information is received or from the information. In the first exemplary embodiment described here, the notification server MWIS does not receive any further information from the message services. In alternative embodiments, on the other hand, further information, for example message header information which contains details on the sender of the message, the reference, transmission date and time and so on is transmitted to the notification server MWIS. It is also possible for the message header information to be transmitted to the notification server MWIS only in response to a particular request by it.

The notification server MWIS stores the information received from the message services and generates for each message display a notification which indicates to the subscriber the presence of a message and indicates the message service in which this message is present. In the first two exemplary embodiments shown in Fig. 1, this notification is a GSM-SMS message which is transmitted via a network according to the CTM Phase 2 standard (CTM = Cordless Terminal Mobility) on a network to a dual-mode radiotelephone HS1 of the subscriber. The dual-mode radiotelephone HS1 is a combination of a GSM and a DECT telephone which the subscriber can carry continuously on his person. The CTM network comprises both GSM networks and

DECT networks, and the GSM-SMS notification emitted by the notification server is automatically directed within these networks to the dual-mode radiotelephone HS1. The subscriber can therefore receive the notification within a very large
5 spatial area. In response to receiving the notification, the subscriber can, if considered suitable or necessary, retrieve the message from the message service specified in the notification.

10 Referring now to Fig. 2, in the second exemplary embodiment the notification server MWIS receives the message indications from the message services in the manner already described. However, in contrast to Fig. 1, a plurality of subscriber terminals to which the message notifications can be
15 transmitted are provided here.

More precisely, the notification server MWIS can transmit a notification by means of a signaling operation on the ISDN-D channel via the ISDN network to a line-bound ISDN telephone
20 TS1 of the subscriber. A notification transmission via the CTM network to the dual-mode radiotelephone HS1 already shown in Fig. 1 is likewise possible. However, in Fig. 2, the notification server MWIS does not access the CTM network directly, but rather the notification is output onto the
25 Internet, and passed on from there as a GSM-SMS message to the CTM network. In addition, the notification server is

configured to transmit notifications in the form of e-mail messages via the data network DN to a personal computer PC of the user. Finally, the notification server can also transmit notifications in the form of signaling operations, text or
5 synthesized voice over the private network PISN to a DECT telephone HS1 and a fixed telephone TS2. The distribution of incoming notifications between the DECT telephone HS1 and the fixed telephone TS2 is carried out by means of the private network PISN.

10 In the second exemplary embodiment described here, the notification server MWIS passes on, for each incoming message indication, a corresponding notification to all the connected terminals of the subscriber. The subscriber can thus always be
15 reached if he has access to one of these terminals. In the case of the system shown in Fig. 2, the notification server MWIS is connected, to a certain extent, to the same networks on its input sides and output sides. In this case, the notification is not transmitted to that terminal from which
20 the message of which there was notification originates.

In order to transmit the notification to the ISDN telephone TS1, a message indication (MWI) according to the ISDN standard is transmitted. The number of waiting messages and their type
25 may be specified here. In the private network PISN, it is possible to transmit a message indication similarly to in the

ISDN network if the private network PISN and the DECT telephone HS2 support the CAP standard (CAP = CTM Access Profile). In the GSM network, a short text message is, as already described, transmitted, so that a visual and/or
5 audible message indication is also triggered on the GSM telephone HS1. In alternative embodiments, the notification can be transmitted at all terminals which support a voice transmission, by means of a call set-up. The subscriber then receives a call in which he is informed of the presence of a
10 message in a specific message service using synthetic voice.

In a further alternative embodiment, the notification is not transmitted to all the terminals of the subscriber but rather just to one terminal or to some of these terminals. The
15 selection of the terminals can be carried out centrally, for example by means of a system administrator. However, it is also possible for the subscriber to make the selection himself. To do this, the subscriber can transmit a suitable control information item to the notification server from one
20 of his terminals. The control information item can include the addresses (for example telephone numbers) of those terminals to which the notifications are to be directed. As an alternative, it is possible to provide for the notification server MWIS to direct future messages only to the terminal, or
25 also to the terminal, from which the last received control information item originates. The subscriber can then register

a terminal as a notification receiver by means of a simple selection of the notification server.

In further alternative embodiments, in contrast with the representation of Fig. 2, other or additional communications paths and terminals are provided. In particular, possibilities are provided which permit the subscriber to interrogate at the notification server MWIS notifications which are present for him or her from any desired terminal. For example, it may be provided that the subscriber can dial the notification server MWIS from a public telephone and then receive the notifications by means of voice output. If the subscriber uses a mobile computer with a modem or an Internet access in order to access the notification server MWIS directly, the notifications are output in text form. In all these cases, an authorization check of the subscriber is, as a rule, necessary, for example by means of a password.

The data flow in a notification server MWIS is illustrated in more detail in Fig. 3. As already described, the notification server MWIS has inputs E1, E2, ..., En for message indications of message services and outputs A1, A2, ..., An for notifications to terminals of the subscribers. The inputs and outputs are connected, as illustrated in Figs. 1 and 2 to different communications networks and message services. For each input and output, an interface adapter device IWU

(Interworking Unit) which performs the necessary adaptation functions for the exchange of messages with the message services is provided for each input and output in the notification server MWIS.

5

The notification server MWIS in Fig. 3 is provided for use in a third exemplary embodiment of the invention in which at least some of the message services transmit a comprehensive message header information item to the notification server MWIS when a new message is present.

10

The message indications which are received from the message services are directed to a filter device FLT by the interface adapter devices IWU. The filter device FLT determines, according to predefined criteria or criteria which are set by the subscriber, the new messages for which a notification is to be output to the user. Depending on what types of information the message indications contain, such criteria may be, in particular, the priority of the new messages, the identity, determined by the name or the telephone number, of the transmitter or keywords in a title indication or reference indication of the message header information. For example, the subscriber can stipulate that no notification is to be generated for messages from certain senders, or that a notification is to be generated only for messages from certain senders. In alternative embodiments, the filter device FLT can

15

20

25

also order the incoming message indications according to their priority.

The filtered message indications are then fed to a formatting
5 device FMT. The formatting device FMT extracts from the
message indications that information which the subscriber is
to receive with the notification. This can be stipulated in
advance or by the subscriber. For example, the subscriber can
determine that he wishes to receive only the sender name and
10 the title of the message. In alternative embodiments, the
formatting device FMT can make available a plurality of
formatting patterns which can be selected as a function of the
capabilities of the terminal or of the terminals to which the
notification is to be transmitted. For example it is possible
15 to stipulate that a notification which is transmitted as a
short text message will have more information than a message
indication according to the ISDN standard. In further
alternative embodiments, the terminals which are provided for
the reception of the notification can be selected as a
20 function of the information to be transmitted with the
notification.

The actual notifications are ultimately generated by a
generating device GEN. Depending on the type of terminal to
25 which the notification is transmitted, the generating device
GEN produces a text notification or a voice notification in

synthetic language from the information originating from the
formatting device FMT. The message which is output by the
generating device GEN is ultimately output via the interface
adapter device IWU and the communications networks connected
5 to the notification server MWIS to the desired terminal or the
desired terminals of the subscriber.

We claim:

1. A method of notifying a subscriber of a plurality of message services of a message:

indicating, with each of a plurality of message services, to a common notification server a presence of a new message for a subscriber on the respective message service; and

transmitting, with the notification server, to at least one terminal of the subscriber a notification indicating that a new message is present and in which message service the new message is present.

2. The method according to claim 1, which comprises, if a message service indicates the presence of a new message, storing with the notification server the data originating from the message service, until the respective notification has been transmitted successfully.

3. The method according to claim 1, wherein the transmitting step comprises transmitting with the notification server the notification to all terminals of the subscriber.

4. The method according to claim 1, wherein the transmitting step comprises transmitting with the notification server the notification to the notification server to at least one

terminal selected by the subscriber from a plurality of terminals.

5. The method according to claim 4, wherein the subscriber selects a terminal by transmitting a control information item from the respective terminal to the notification server.

6. The method according to claim 1, which comprises transmitting with each message service a message header information item to the notification server when a new message is present, and transmitting the message header information with the notification server at least partially to at least one subscriber terminal enabled, at least partially, to output the message header information.

7. The method according to claim 1, which comprises, in response to a request by the notification server, transmitting with each message service a message header information item to the notification server, and transmitting the message header information item with the notification server at least partially to at least one subscriber terminal enabled to output the message header information at least partially.

8. The method according to claim 1, which comprises, in response to a subscriber request from any terminal, firstly performing an authorization check with the notification server

and then transmitting the notifications present to the terminal.

9. The method according to claim 1, which comprises processing with the notification server the data originating from the message services for generating the notifications transmitted to the subscriber.

10. The method according to claim 9, wherein the processing step comprises selecting one or more processes from the group consisting filtering, ordering, and formatting the data.

11. The method according to claim 1, wherein the transmitting step comprises transmitting the notifications by means of a signaling operation to the at least one terminal of the subscriber.

12. The method according to claim 1, wherein the transmitting step comprises transmitting the notifications by means of a call set-up to the at least one terminal of the subscriber.

COMBINED DECLARATION AND POWER OF ATTORNEY
IN ORIGINAL APPLICATION

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR GIVING NOTIFICATION OF A MESSAGE TO A SUBSCRIBER

described and claimed in the specification bearing that title, that I understand the content of the specification, that I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve month prior to this application, that I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application under 37 C.F.R. 1.56a, and that no application for patent or inventor's certificate of this invention has been filed earlier than the following in any country foreign to the United States prior to this application by me or my legal representatives or assigns:

German Application No. 197 43 241.7, filed September 30, 1997, the International Priority of which is claimed under 35 U.S.C. §119; and International Application No. PCT/DE98/02629, filed September 7, 1998, the Priority of which is claimed under 35 U.S.C. §120.

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

HERBERT L. LERNER (Reg.No.20,435)
LAURENCE A. GREENBERG (Reg.No.29,308)
WERNER H. STEMER (Reg.No.34,956)
RALPH E. LOCHER (Reg.No. 41,947)

Address all correspondence and telephone calls to:

LERNER AND GREENBERG, P.A.
POST OFFICE BOX 2480
HOLLYWOOD, FLORIDA 33022-2480
Tel: (954) 925-1100
Fax: (954) 925-1101

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST JOINT INVENTOR: VINCENZO SCOTTO DI CARLO

INVENTOR'S SIGNATURE: _____

DATE: _____

Residence: MÜNCHEN, GERMANY

Country of Citizenship: ITALY

Post Office Address: HORWITZSTRASSE 4/I
D-81739 MÜNCHEN
GERMANY

FULL NAME OF SECOND JOINT INVENTOR: EGON SCHULZ

INVENTOR'S SIGNATURE: _____

DATE: _____

Residence: MÜNCHEN, GERMANY

Country of Citizenship: GERMANY

Post Office Address: WITTENBERGER STRASSE 3
D-80993 MÜNCHEN
GERMANY

Abstract of the Disclosure:

In a method for giving notification of a message to a subscriber who is registered with at least two message services, each message service indicates to a common

5 notification server at least the presence of a new message for the subscriber on that respective message service. The notification server transmits to at least one terminal of the subscriber a notification which includes at least the fact that a new message is present and identifies the message

10 service in which the message is present. It is thus possible for a subscriber who is registered with a plurality of message services to be informed of the presence of a new message in a very reliable, quick and problem-free way.

WHS:tg - 97p2659F//3/29/2000

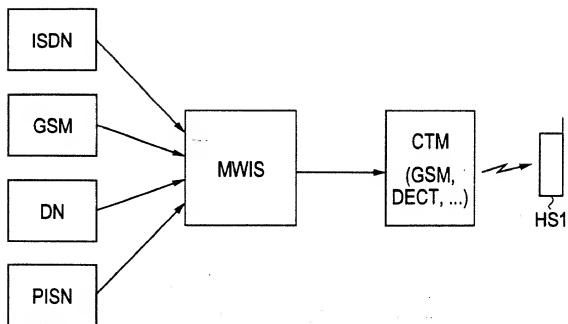


FIG 1

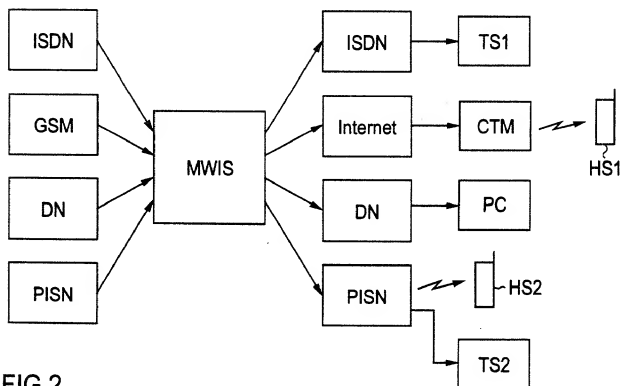


FIG 2

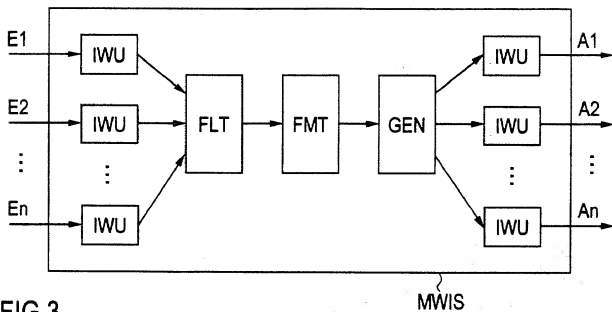


FIG 3